



LR6-60OPH 340~360M

Hi-MOX

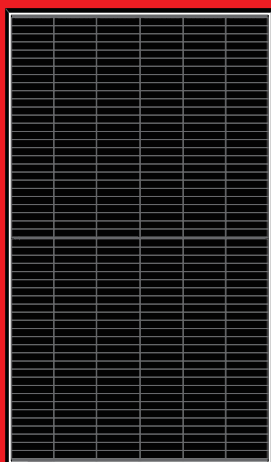

High Efficiency Low LID Mono PERC with OVERLAP Technology to Deliver Superior Power with Aesthetic Appearance

12-year Warranty for Materials and Processing;
25-year Warranty for Extra Linear Power Output

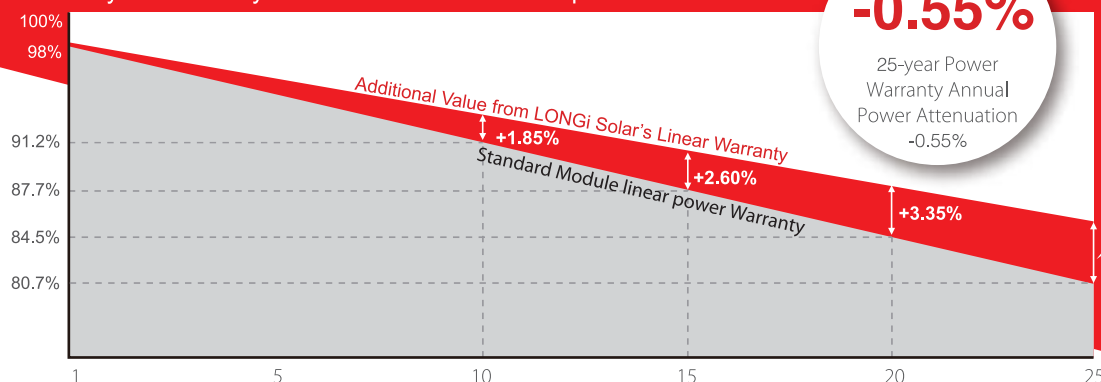

Complete System and Product Certifications

IEC 61215, IEC 61730

ISO 9001:2008: ISO Quality Management System

ISO 14001: 2004: ISO Environment Management System

OHSAS 18001: 2007 Occupational Health and Safety



* Specifications subject to technical changes and tests.
LONGi Solar reserves the right of interpretation.

Positive power tolerance (0 ~ +5W) guaranteed

High module conversion efficiency (up to 20.6%)

Slower power degradation enabled by Low LID Mono PERC technology: first year <2%, 0.55% year 2-25

Better energy yield with excellent low irradiance performance and temperature coefficient

Solid PID resistance ensured by solar cell process optimization and careful module BOM selection

Robust frame (35mm) withstands mechanical loading of 5400Pa for snow load on front and 2400Pa for wind load on rear side

LONGi

LONGi Green Energy Technology Co., Ltd.


Address: Level 8 / 124 Walker Street North Sydney NSW 2060 Australia

Tel: +61 2 8484 5806 E-mail: info@longi-solar.com.au Website: www.long-solar.com.au

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGi have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.

LR6-60OPH 340~360M

Design (mm)

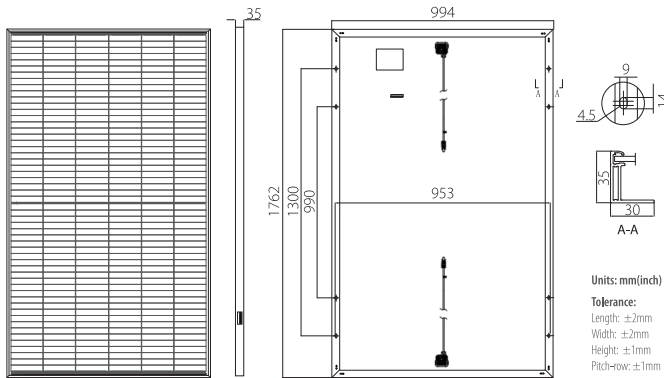

Mechanical Parameters

Cell Orientation: 6 parallels & 2 series
Junction Box: IP67, two diodes
Output Cable: 4mm², positive pole 1200mm, negative pole 1200mm
Connector: Staubli EVO2
Glass: Single glass
3.2mm coated tempered glass
Frame: Anodized aluminum alloy frame
Weight: 19.0kg
Dimension: 1762×994×35mm
Packaging: 30pcs per pallet
180pcs per 20'GP
780pcs per 40'HC

Operating Parameters

Operational Temperature: -40 °C ~ +85 °C
Power Output Tolerance: 0 ~ +5 W
Voc and Isc Tolerance: $\pm 3\%$
Maximum System Voltage: DC1500V (IEC)
Maximum Series Fuse Rating: 20A
Nominal Operating Cell Temperature: 45 ± 2 °C
Safety Protection Class: Class II
Fire Rating: Class C according to UL790

Electrical Characteristics

Test uncertainty for Pmax: $\pm 3\%$

| Model Number | LR6-60OPH-340M | | LR6-60OPH-345M | | LR6-60OPH-350M | | LR6-60OPH-355M | | LR6-60OPH-360M | |
|----------------------------------|----------------|-------|----------------|-------|----------------|-------|----------------|-------|----------------|-------|
| Testing Condition | STC | NOCT | STC | NOCT | STC | NOCT | STC | NOCT | STC | NOCT |
| Maximum Power (Pmax/W) | 340 | 251.9 | 345 | 255.6 | 350 | 259.3 | 355 | 263.0 | 360 | 266.7 |
| Open Circuit Voltage (Voc/V) | 38.1 | 35.6 | 38.3 | 35.7 | 38.5 | 35.9 | 38.7 | 36.1 | 38.9 | 36.3 |
| Short Circuit Current (Isc/A) | 11.62 | 9.37 | 11.72 | 9.45 | 11.81 | 9.52 | 11.91 | 9.60 | 11.99 | 9.67 |
| Voltage at Maximum Power (Vmp/V) | 31.4 | 29.0 | 31.6 | 29.2 | 31.8 | 29.4 | 32.0 | 29.6 | 32.2 | 29.7 |
| Current at Maximum Power (Imp/A) | 10.83 | 8.68 | 10.92 | 8.76 | 11.01 | 8.83 | 11.10 | 8.90 | 11.18 | 8.97 |
| Module Efficiency(%) | 19.4 | | 19.7 | | 20.0 | | 20.3 | | 20.6 | |

STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25 °C, Spectra at AM1.5

NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m², Ambient Temperature 20 °C, Spectra at AM1.5, Wind at 1m/s

Temperature Ratings (STC)


Temperature Coefficient of Isc: +0.057%/°C
Temperature Coefficient of Voc: -0.286%/°C
Temperature Coefficient of Pmax: -0.370%/°C

Mechanical Loading


Front Side Maximum Static Loading: 5400Pa
Rear Side Maximum Static Loading: 2400Pa
Hailstone Test: 25mm Hailstone at the speed of 23m/s

I-V Curve


Current-Voltage Curve (LR6-60OPH-350M)



Power-Voltage Curve (LR6-60OPH-350M)



Current-Voltage Curve (LR6-60OPH-350M)



LONGi

LONGi Green Energy Technology Co., Ltd.

Address: Level 8 / 124 Walker Street North Sydney NSW 2060 Australia
Tel: +61 2 8484 5806 E-mail: info@longi-solar.com.au Website: www.long-solar.com.au

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGi have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.