

powered by

**Q.ANTUM DUO**

# Q.PEAK DUO L-G7

## 385-405

ENDURING HIGH  
PERFORMANCE



### LOW ELECTRICITY GENERATION COSTS

Higher yield per surface area, lower BOS costs, higher power classes, and an efficiency rate of up to 20.3 %.



### INNOVATIVE ALL-WEATHER TECHNOLOGY

Optimal yields, whatever the weather with excellent low-light and temperature behaviour.



### ENDURING HIGH PERFORMANCE

Long-term yield security with Anti LID Technology, Anti PID Technology<sup>1</sup>, Hot-Spot Protect and Traceable Quality Tra.Q™.



### EXTREME WEATHER RATING

High-tech aluminium alloy frame, certified for high snow (5400 Pa) and wind loads (2400 Pa).



### A RELIABLE INVESTMENT

Inclusive 12-year product warranty and 25-year linear performance warranty<sup>2</sup>.



### STATE OF THE ART MODULE TECHNOLOGY

Q.ANTUM DUO combines cutting edge cell separation and innovative wiring with Q.ANTUM Technology.

<sup>1</sup> APT test conditions according to IEC/TS 62804-1:2015, method B (-1500V, 168h)

<sup>2</sup> See data sheet on rear for further information.

### THE IDEAL SOLUTION FOR:



Rooftop arrays on  
commercial / industrial  
buildings




Ground-mounted  
solar power plants

Engineered in Germany

**Q CELLS**

## MECHANICAL SPECIFICATION

Format	2015mm × 1000mm × 35mm (including frame)
Weight	23.0kg
Front Cover	3.2mm thermally pre-stressed glass with anti-reflection technology
Back Cover	Composite film
Frame	Anodised aluminium
Cell	6 × 24 monocrystalline Q.ANTUM solar half cells
Junction box	53-101mm × 32-60mm × 15-18mm Protection class IP67, with bypass diodes
Cable	4mm <sup>2</sup> Solar cable; (+) ≥1350mm, (-) ≥1350mm
Connector	Stäubli MC4, Hanwha Q CELLS HQC4, Amphenol UTX, Renhe 05-6, Tongling TL-Cable01S, JMTHY JM601; IP68 or Friends PV2e; IP67

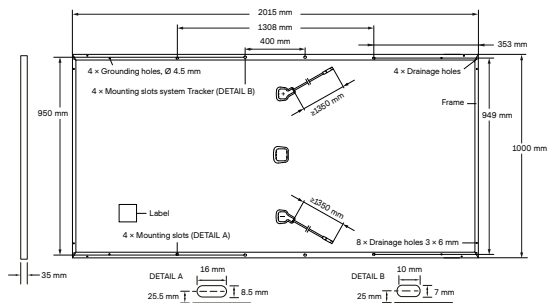


## ELECTRICAL CHARACTERISTICS

POWER CLASS				385	390	395	400	405
MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC <sup>1</sup> (POWER TOLERANCE +5 W / –0 W)								
Minimum	Power at MPP <sup>1</sup>	P <sub>MPP</sub>	[W]	385	390	395	400	405
	Short Circuit Current <sup>1</sup>	I <sub>SC</sub>	[A]	10.05	10.10	10.14	10.19	10.23
	Open Circuit Voltage <sup>1</sup>	V <sub>OC</sub>	[V]	48.17	48.44	48.70	48.96	49.22
	Current at MPP	I <sub>MPP</sub>	[A]	9.57	9.61	9.66	9.70	9.75
	Voltage at MPP	V <sub>MPP</sub>	[V]	40.24	40.57	40.90	41.23	41.56
	Efficiency <sup>1</sup>	η	[%]	≥19.1	≥19.4	≥19.6	≥19.9	≥20.1
MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT <sup>2</sup>								
Minimum	Power at MPP	P <sub>MPP</sub>	[W]	288.3	292.1	295.8	299.6	303.3
	Short Circuit Current	I <sub>SC</sub>	[A]	8.10	8.14	8.17	8.21	8.24
	Open Circuit Voltage	V <sub>OC</sub>	[V]	45.42	45.67	45.92	46.17	46.41
	Current at MPP	I <sub>MPP</sub>	[A]	7.53	7.57	7.60	7.64	7.67
	Voltage at MPP	V <sub>MPP</sub>	[V]	38.29	38.60	38.92	39.23	39.54

<sup>1</sup>Measurement tolerances  $P_{MPP} \pm 3\%$ ;  $I_{SC}$ ;  $V_{OC} \pm 5\%$  at STC:  $1000 \text{ W/m}^2$ ,  $25 \pm 2^\circ\text{C}$ , AM 1.5 according to IEC 60904-3 •  $2800 \text{ W/m}^2$ , NMOT, spectrum AM 1.5


## Q CELLS PERFORMANCE WARRANTY

### PERFORMANCE AT LOW IRRADIANCE

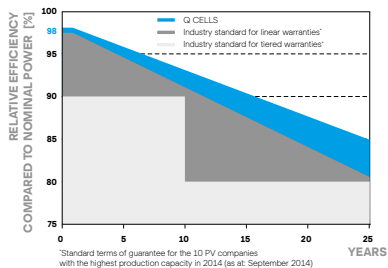

At least 98 % of nominal power during first year. Thereafter max. 0.54 % degradation per year. At least 93.1 % of nominal power up to 10 years. At least 85 % of nominal power up to 25 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Q CELLS sales organisation of your respective country.

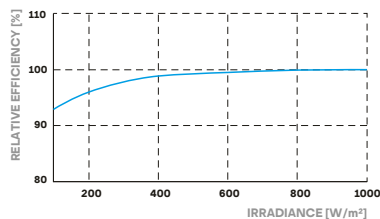

Typical module performance under low irradiance conditions in comparison to STC conditions (25 °C, 1000 W/m<sup>2</sup>).

## TEMPERATURE COEFFICIENTS

Temperature Coefficient of $I_{SC}$	$\alpha$	[%/K]	+0.04	Temperature Coefficient of $V_{OC}$	$\beta$	[%/K]	-0.27
Temperature Coefficient of $P_{MPP}$	$\gamma$	[%/K]	-0.35	Nominal Module Operating Temperature	NMOT	[°C]	43±3

## PROPERTIES FOR SYSTEM DESIGN

Maximum System Voltage	V <sub>sys</sub> [V]	1000 (IEC)/1000 (UL)	PV module classification	Class II
Maximum Reverse Current	I <sub>R</sub> [A]	20	Fire Rating based on ANSI/ UL 1703	C /TYPE 2
Max. Design Load, Push/Pull	[Pa]	3600/1600	Permitted Module Temperature on Continuous Duty	-40°C - +85°C
Max. Test Load, Push/ Pull	[Pa]	5400/2400		

## QUALIFICATIONS AND CERTIFICATES

IEC 61215:2016; IEC 61730:2016;  
This data sheet complies with DIN EN 50380.



## PACKAGING INFORMATION

Number of Modules per Pallet	30
Number of Pallets per Trailer (24t)	24
Number of Pallets per 40' HC-Container (26t)	22
Pallet Dimensions (L x W x H)	2074 x 1130 x 1170mm
Pallet Weight	746kg

**Note:** Installation instructions must be followed. See the installation and operating manual or contact our technical service department for further information on approved installation and use of this product.

**Hanwha Q CELLS GmbH**

Sonnenallee 17-21, 06766 Bitterfeld-Wolfen, Germany | **TEL** +49 (0)3494 66 99-23444 | **FAX** +49 (0)3494 66 99-23000 | **EMAIL** sales@a-cells.com | **WEB** www.a-cells.com

Specifications subject to technical changes © **Q CELLS** Q.PEAK DUO L-G7\_QD\_385-405\_2020-02\_Rev01\_EN

Engineered in Germany

